




BUILDINGEYE

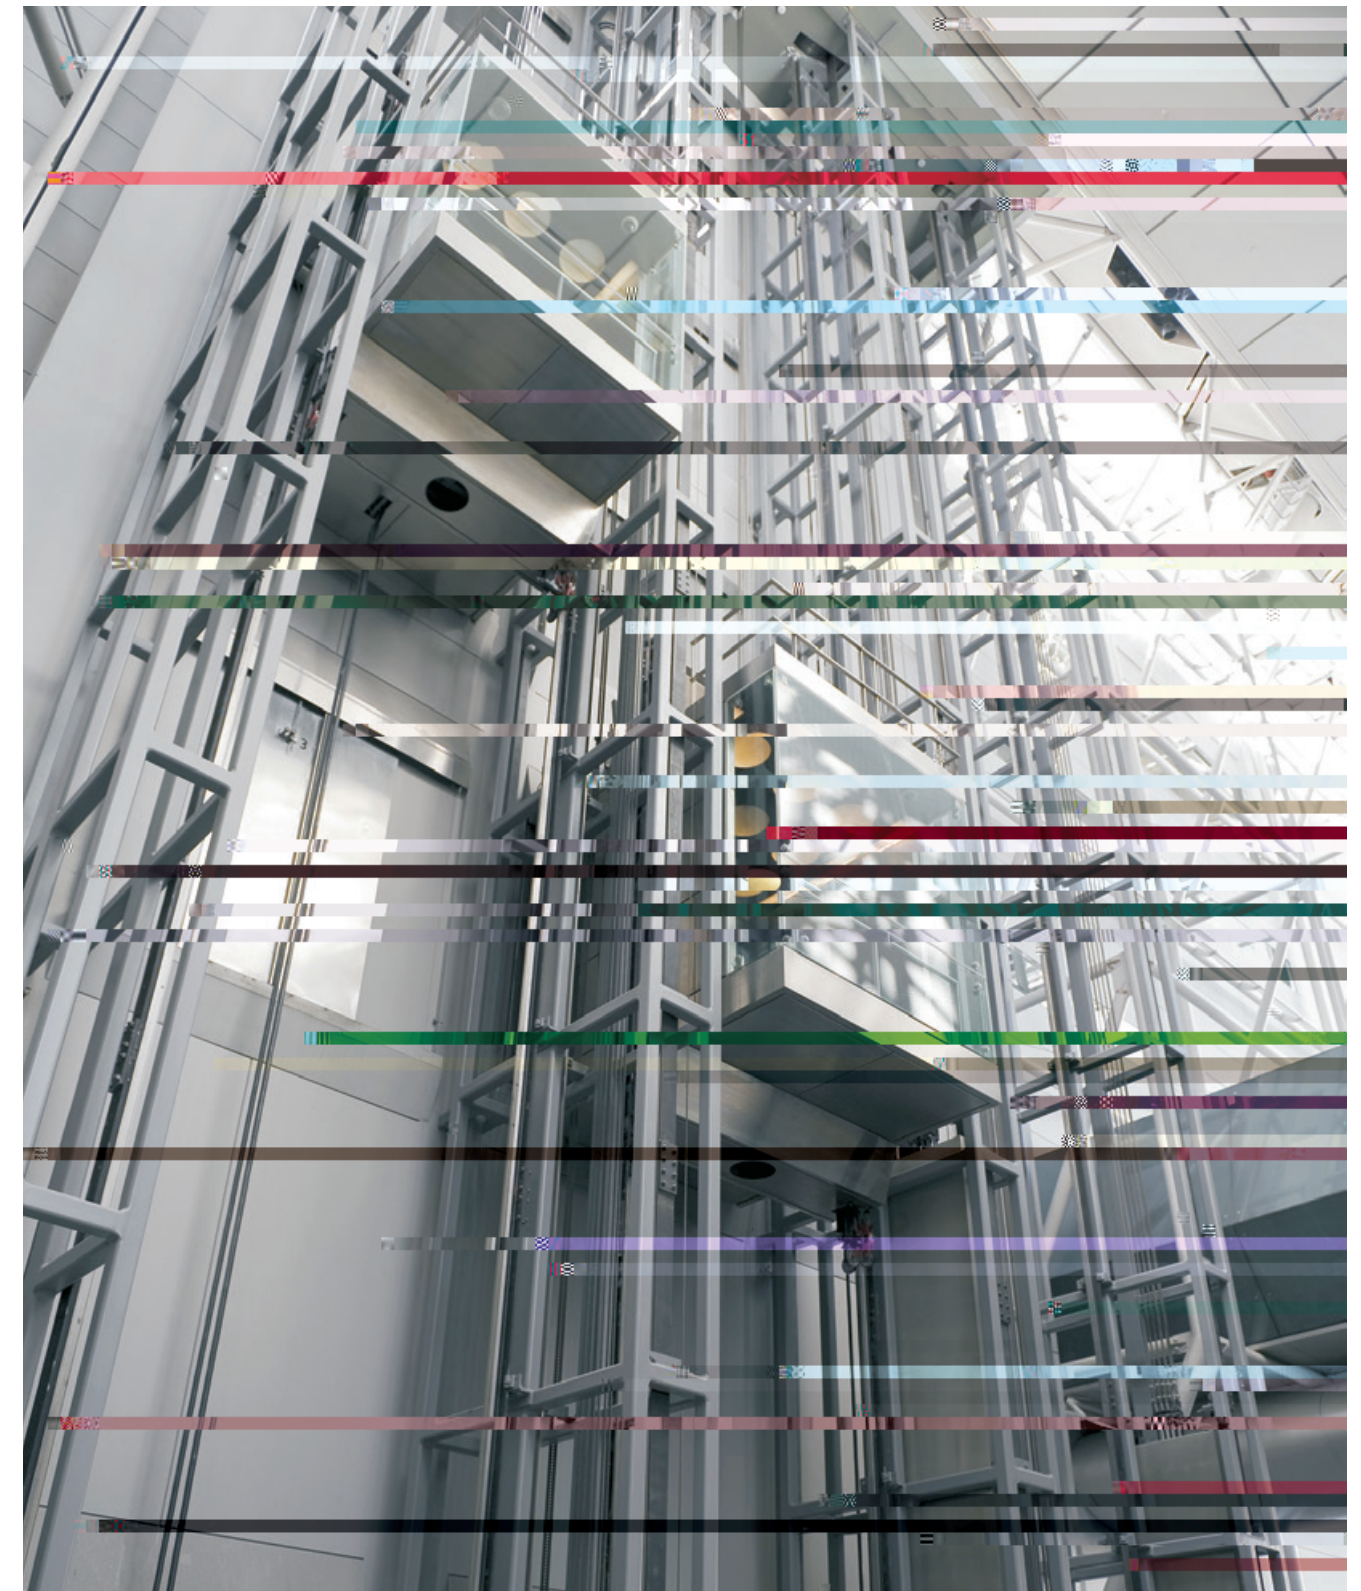

+86-769-82078888 +86-769-87732448
400-6789-443 www.ifelift.com

MMOTTQ

IFE 快意电梯



CLASSICAL & GRACEFUL

IFE BUILDINGEYE-JO,BUILDINGEYE-ME

BUILDINGEYE-JO,BUILDINGEYE-ME IFE
BUILDINGEYE-JO,BUILDINGEYE-ME

BUILDINGEYE-JO, BUILDINGEYE-ME,embodies the simpleness and elegance by its beautiful shape, inner decoration,and fashionable design. Whenever you ride it , you will see that the ceiling and the floor maps each other, metal car door matches transparent glass which reflects modern atmosphere.
BUILDINGEYE-JO,BUILDINGEYE-ME panoramic elevator interpreter IFE on the building function and aesthetics to grasp vividly rendered, so that BUILDINGEYE -JO, BUILDINGEYE-ME in the construction both inside and outside with a wealth of appeal.



market



hotel



scenic spot





FOREIGN REPRESENTATIVE CASES



MASHARY
Kuwait MASHARY MALL



Existing Village Hotel Albert Court

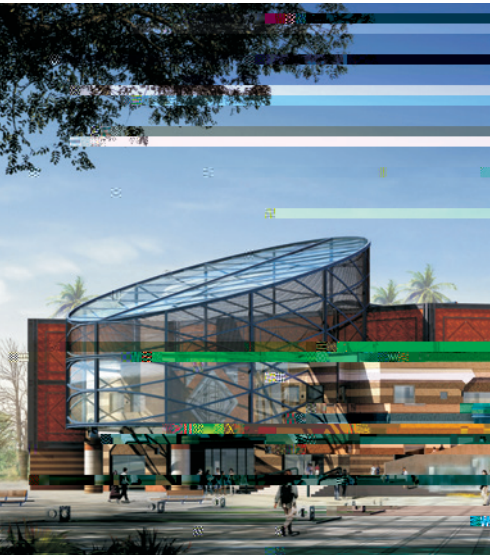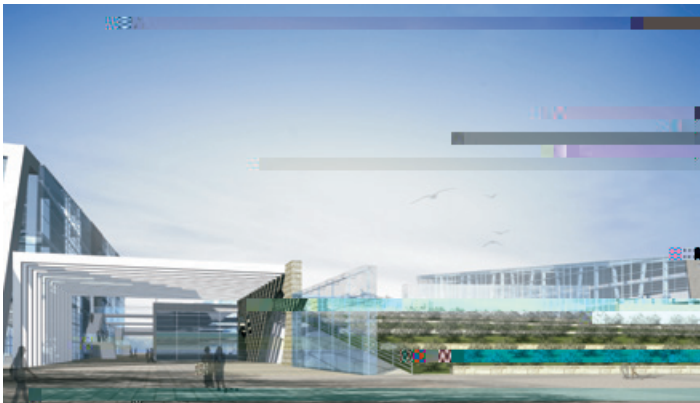

Sha-Ali
Bangladesh Sha-Ali Shopping



MISHREFLN-4124
Kuwait LN-4124 NATIONAL SECURITY BUREAU AT MISHREF

ZL201621450975.5





_rfi afk dbvb

IFE

Outdoor sightseeing ladder equipped with accompanying cable windproof control system (optional)

}

LED

LED ,

LED car lighting leads the new wave of energy-saving elevators

All cars are equipped with LED lighting devices, which respond to the national call for energy saving, safe,efficient, radiation-free and easy to maintain. It is a modern model of healthy and green living.

45%

40 45% 5 10dB(A)


The energy saving of environmental protection driving system is up to 45%

The elevator is innovatively driven by permanent magnet synchronous traction machine to improve the operation efficiency, with low starting current, small volume and low noise. Compared with the elevator driven by worm wheel and worm, the elevator saves energy by 40-45% and reduces noise by 5-10db (A).


IFE

Intelligent control system to save more energy


IFE responds to green environmental needs and creates green driven elevators for customers. For example, when no one is in the elevator, the intelligent control system enables lighting, ventilation and so on to automatically switch to standby mode.

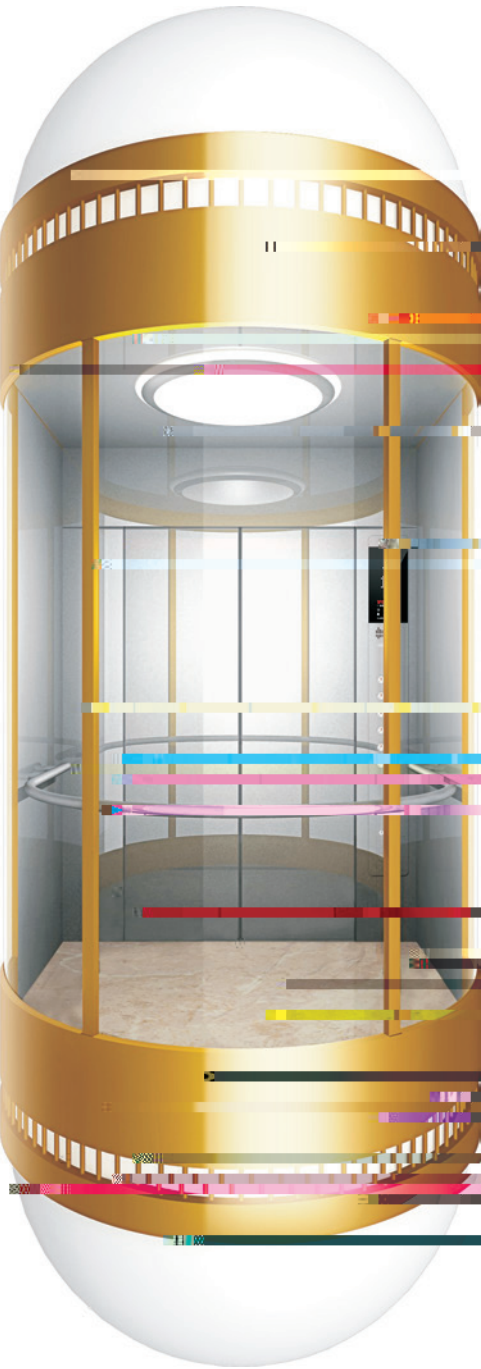



BEC01-00

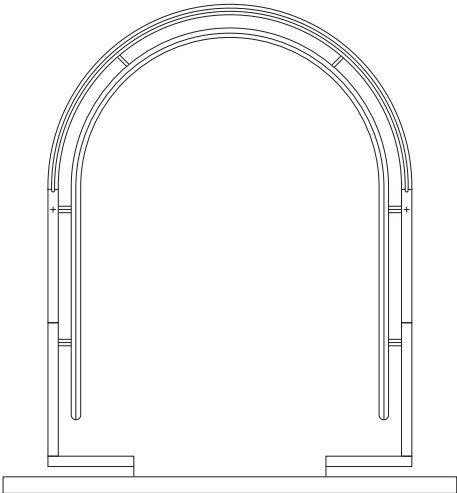

:	C50J00	H	:
	COP11J00		
:	CW98-00	H	
:	L01J00		
:	F03-00 PVC		
:	CC01-00	H	
:	H20-00		

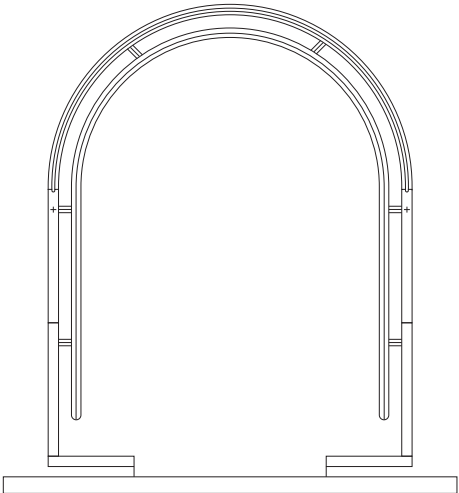

:		HPC	HL ED
	COP11J00		
:	CW98J00	H	
:	L01J00		
:	F03-00 PVC		
:	CC02J00		

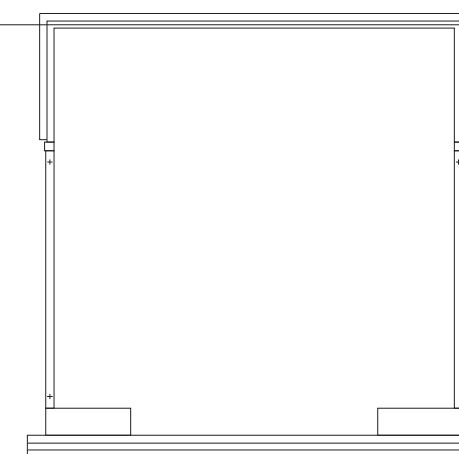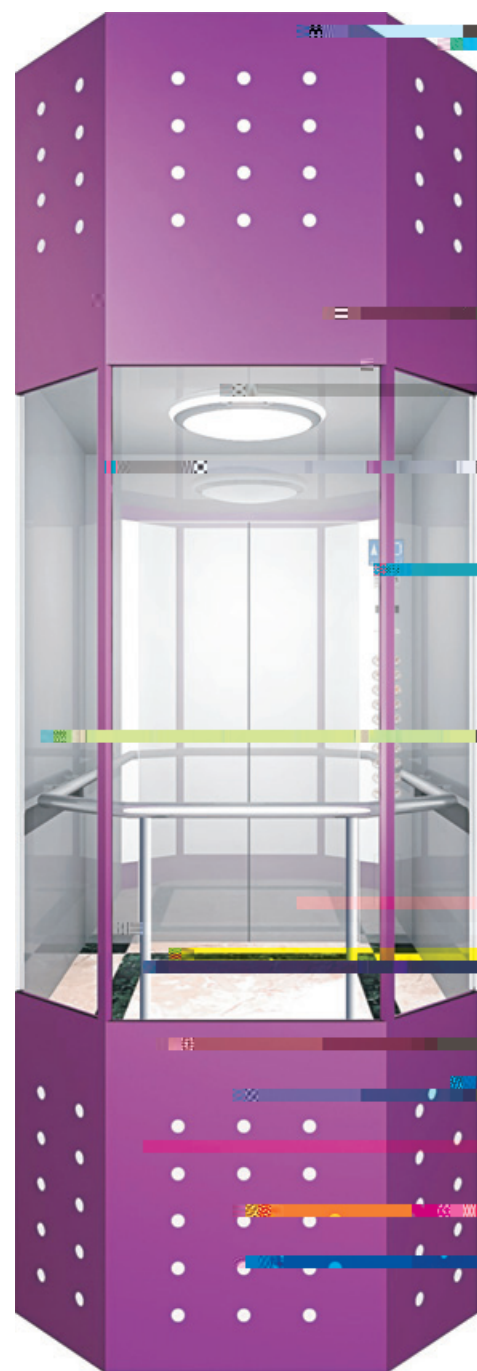







轿厢装饰规格

DECORATION CONFIGURATION

		
COP34-00()	COP39-00()	COP16-00()
:	:	:
:	:	:
COP34-00(Standard)	COP39-00(Optional)	COP16-00(Optional)
Panel: Hairline Stainless Steel	Panel: Hairline Stainless Steel	Panel: Hairline Stainless Steel
Display: White Dot-matrix	Display: White Dot-matrix	Display: Single Color LCD

		
HOP37-00()	HOP41-00()	HOP38-00()
:	:	:
:	:	:
HOP37-00(Standard)	HOP41-00(Optional)	HOP38-00(Optional)
Panel: Hairline Stainless Steel	Panel: Hairline Stainless Steel	Panel: Hairline Stainless Steel
Display: White Dot-matrix	Display: White Dot-matrix	Display: White Segment Code

FLOORS

			
F01-01	F01-04	F01-05	F01-06
			
F01-07	F01-08	F02-03	F02-04

BUILDINGEYE-BOLD BUILDINGEYE-ME

Run Func

Saf

Full selective collection

Full-load by pass;

Decompression button/Door release button light
Car call reset

DZC Dr Interlock

Home landing

Do not use if you are pregnant or breastfeeding
Do not use if you are taking any other medicine

Door reverse...

ttingDOSP

Door reverse
State door pinsterken epsilon phase device

SMEPD

OP

SLC

DR

19

0007
EPT
RE-OP
ANCCP
RO
DOBL/DCBL
DCS/DCB
FLP

HL

Standard functions

21	RMG	Reversal movement Guard
22	BG	Breaker guard
23	CNRP	Contactors non-releasing protection
24	FSSSES	Speed limited switching in terminator
25	BUFER	Buffer
26	MSCP	Microcomputer self-check protection
27	ALRF	Anti-locked rotor feature of motor
28	FS	Fault storage
29	SDCB	Star-delta contactor brake
30	RALP	Rope Anti-loose Protection
35	DCD	Door circuit detection

Special operating

Buzzer
Bypass switch
Attendant operation

36	A	Attendant operation
37	BZZZER	
38	IS	Independent service
	MFS	Main floor se
39		
40		

Optional functions

41	FFS	Firefighting floor setting
42	IO	Inspection operation
43	FCPS	Flexible car park set

Man-machine interface

44	DMPI	Dot-matrix(red) position indicator	LED
45	DMDI	Dot-matrix(red) direction indicator	LED
46	FMFS	Floor market flexible set	
47	AG	Arrival gong	

Emergency Function

48	AB	Alarm button
49	ECL	Emergency car lighting
50	FSI	Five station intercom 4x0.75mm2 (≤1800)
51	EFO	Emergency fire operation
52	FO	Fireman's operation
53	ER	Emergency rescue

3	↑ ↓	⏏ ↻	Emergency function
---	-----	-----	--------------------


BUILDINGEYE-JO

BUILDINGEYE-JO TECHNICAL SPECIFICATION

NO.	Specification		630(8 /p)			800(10 /p)			1050(14 /p)			1350(18 /p)	1600(21 /p)
01	kg Rated capacity(kg)		630			800			1050			1350	1600
02	Car shape												
03	m/s Speed(m/s)		1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75	1.0 1.75
04	Control system		Full collective operation										
05	Driving system		VVVF VVVF Driving										
06	Door control		VVVF VVVF Door control										
07	Traction machine		PM/Gearless										
08	Communication method		Serial Communication										
09	* * (mm) Car size(width*depth*height)		1100* 1400* 2350	1100*1550*2350		1300* 1450* 2350	1300*1600*2350		1500* 1600* 2350	1500*1700*2350		1700*1900*2350	1700*2200*2350
10	* (mm) Door opening size(width*height)		800*2100			800*2100			900*2100			1100*2100	1100*2100
11	(m) Travel height(TR)	1.0m/s	≤ 45			≤ 45			≤ 45			≤ 45	≤ 45
		1.75m/s	≤ 75			≤ 75			≤ 75			≤ 75	≤ 75
12	* (mm) Hoistway size (width*height)		2200* 1850	2200*2050		2400* 1950	2400*2050		2600* 2050	2600*2150		3050*2350	3050*2650
13	Motor position		In the top of the shaft										
14	(mm) Overhead(OH)	1.0m/s	4700	4700	4700	4700	4700	4700	4700	4700	4700	4700	4700
		1.75m/s	4900	4900	4900	4900	4900	4900	4900	4900	4900	4900	4900
15	(mm) Pit depth(PD)	1.0m/s	1500	1700	1600	1500	1800	1600	1500	1900	1600	2000	2000
		1.75m/s	1650	1850	1750	1650	1950	1750	1650	2050	1750	2150	2150
16	Main power supply		380V 50Hz					≤ 4Ω					
		1.0m/s	3*6mm ² +2*6mm ²									3*10mm ² +2*6mm ²	
		1.75m/s	3*6mm ² +2*6mm ²						3*10mm ² +2*6mm ²				

≤ 700mm

Note The following overhead height is only applicable for the elevators that are not inside steel structure shaft and those elevators with car top is no more than 700mm away from the shaft wall.

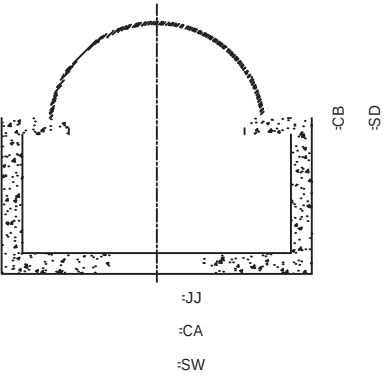

Diamond panoramic elevator
shaft plan

JJ
CA
SW

CB SD

shaft section plan